

Suitable for  
very heavy  
loads

# All-in-one solution

for a stable and rut-free gravel surface



## Weed-resistant

The high-quality weed control membrane prevents weed growth from the underside



## Quick processing

Can be easily cut to size, with a bottom layer of weed control membrane already integrated



## Very strong

The hexagonal cell structure can withstand very heavy loads. EuroGravel PRO is currently the strongest gravel stabilisation system available on the market



## Easy to install

The grids can be easily laid out and installed. The gravel grids do not use a special connection system, so they are very easy to install



## Water permeable

The gravel grids and the weed control membrane are permeable to water



## Recyclable

The membrane is attached with a glue free system and is made of the same material as the gravel grid

## Choose a rut-free and easily walkable gravel surface

EuroGravel PRO gravel stabilisation grids make it very easy to lay down a uniform and rut-free gravel surface. The result is an extremely stable and load-resistant surface that is not susceptible to deformation or rutting. The weed control membrane on the bottom side prevents the growth of weeds from the underside. It's the perfect all-in-one solution for small decorative gardens as well as driveways, large car parks, golf courses, camping sites etc.



The research institute TNO did a test that proves the EuroGravel PRO stabilisation grids can be loaded with very high loads.



## Very high load resistance

The EuroGravel PRO gravel stabilisation system can withstand very high loads and is therefore ideal for surfaces subjected to such high loads. A properly installed and stable foundation is very important in this regard.

Test	Maximum permissible load:
Empty panel	> 340 tons per square metre
Filled panel	> 11,881 tons per square metre


## Freeze thaw resistant

Conform NEN-EN-1338, no noticeable damage. It would be advisable, however, to install and cover the product within 2 weeks of removing the shrink sleeves.

# EuroGravel<sup>®</sup> PRO

### Specifications

Panel dimensions	119 x 78.6 x 3 cm
Cell diameter	51mm
Cell wall thickness	below: 4mm above: 3mm
Panels per m <sup>2</sup>	1.12
M <sup>2</sup> per panel	0.9 m <sup>2</sup>
Weight per panel	3050 grams
Gravel/chippings consumption	approx. 75kg per m <sup>2</sup>
Available colours	black and white
Gravel size	Min. 5mm, max. 25mm
Chipping size	Min. 5mm, max. 20mm
Weight of weed control membrane	100 g/m <sup>2</sup>
Water permeability of weed control membrane	110 l/m <sup>2</sup> .s (conform EN-ISO-11058)
Tensile strength of weed control membrane (CMD/MD)	8 kN/m (conform EN-ISO-10319)

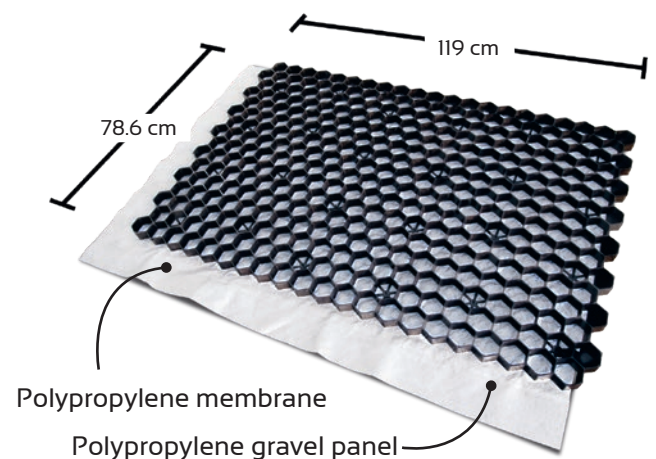

Your EuroGravel dealer:

